

AnMa TECH

For all your bolting needs

Report nr.:

20163010

Serial nr.:

460

Tool:

Rapid Torc RT-3

Ma min:

651

Ma max:

4379

Date:

21-03-16

Technician:

Richard Dijkgraaf

Equipment:

AWS-4050 TTCA-10K S/N 15542-1

Customer:

Shutdown Fasteners and Specials Belgium

Pressure (Bar)	Target (Nm)	Measured (Nm)	Difference %
100	626	630	0,71
150	938	945	0,71
200	1251	1250	-0,09
250	1564	1570	0,39
300	1877	1870	-0,36
350	2190	2180	-0,43
400	2502	2560	2,31
450	2815	2876	2,16
500	3128	3100	-0,89
550	3441	3425	-0,45
600	3753	3750	-0,09
650	4066	4060	-0,15
700	4379	4386	0,16

Result:

Torque output is verified and within the range of +/- 3%

Signature:


--

AnMa TECH

For all your bolting needs

Calibration date:	21-03-16
Calibration due:	21-03-17

Tool model:	Rapid Torc RT-3
Serial nr.:	460

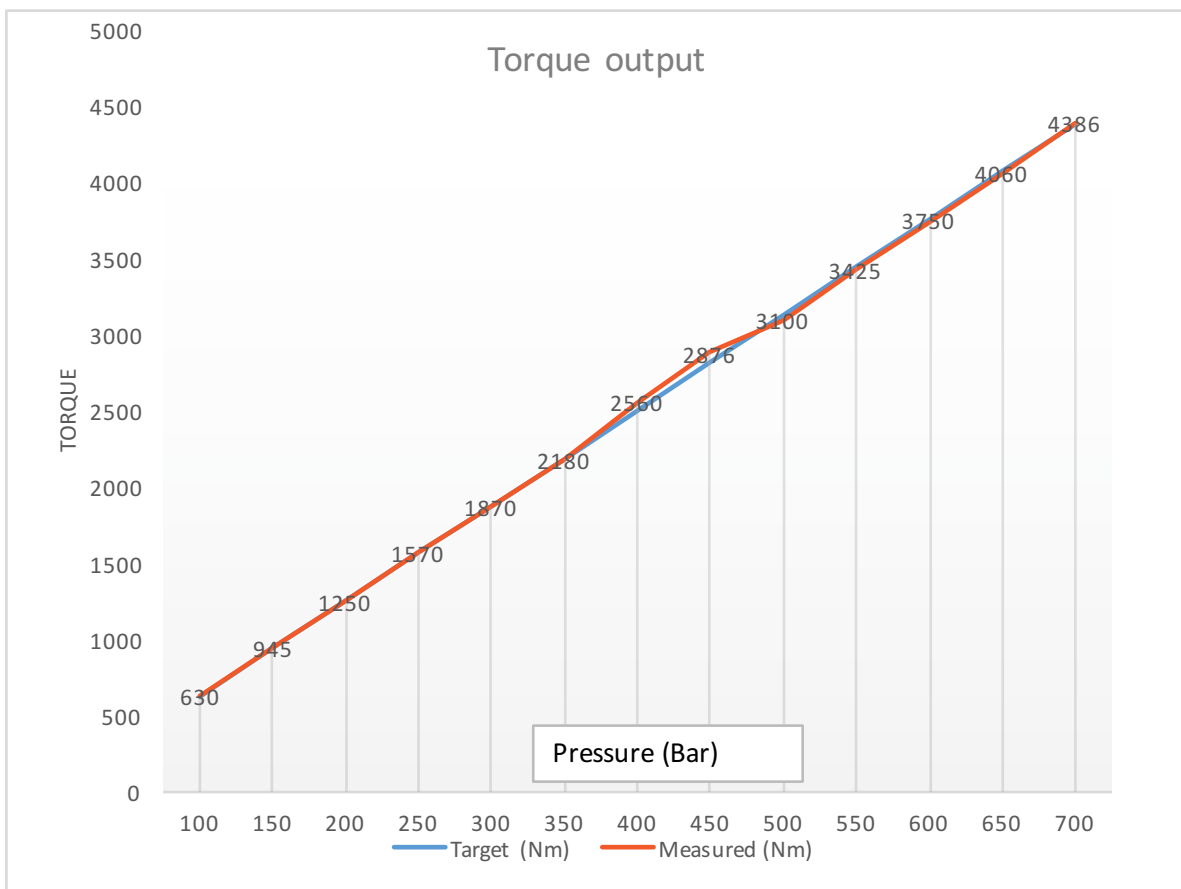

Disclaimer:

AnMa TECH BV does not take liability for any damage caused by observations made or remarks noted on this report.

Every check and/or test is a snap shot.